


CRBG SERIES

COLD WATER PRESSURE WASHER

Belt Drive • Gasoline Powered • Industrial Cart

- **Downstream Adjustable Chemical Injector:**
For low pressure soap and chemical injection.
- **Quick Connect Hose Connectors:**
For easy on/off connections and tangle free hoses.
- **Honda GX Gasoline Engine**
Includes re-coil start and low oil alert system.
- **Separate Unloader with Easy Start Valve:**
Diverts water pressure when trigger is not in use. Includes easily adjustable pressure control knob and all brass fittings.
- **13" Never-Go-Flat Tires:**
Ball bearing construction with a steel rim and hub assembly.
- **Clear Inlet Filter:**
Helps reduce contaminants from entering the pump.

- **Pressure Gauge**

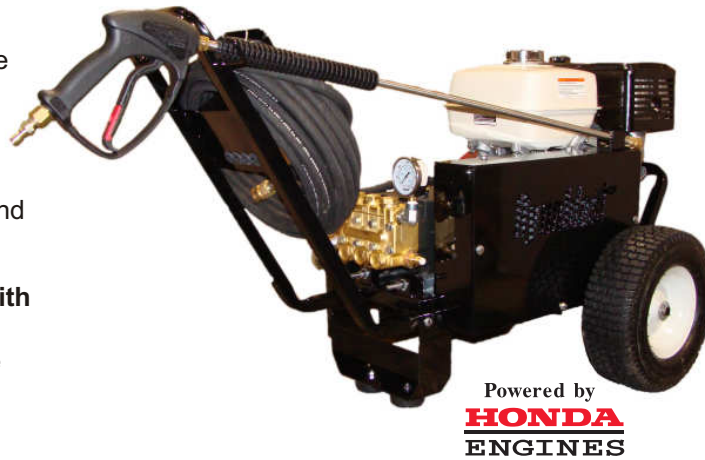

- **Four Quick Connect Nozzles:**
Colour coded nozzles included are 0°, 15°, 25° and soap.
- **50' High Pressure Hose:**
Durable non-marking steel braided hose.
- **Heavy Duty Cart:**
With power coated finish.
- **Quality Gun and Stainless Steel Lance Combination:**
Easy pull trigger with 36" lance.
- **Belt Drive:**
Slower speed increases the life of the pump.
- **High Quality Triplex Plunger Pump:**
All Dynablast pressure washers include GP/Interpump pumps with solid ceramic plungers, thermal pump protector and limited 5 year warranty.
- **Vented Belt Guard:**
Reduces heat and improves belt life
- **Pump Puller:**
Easier belt adjustment

- **Rubber Foot:**
Reduces vibration

SPECIFICATIONS

ASSEMBLED IN CANADA

MODEL	CR4035BG	CR4035BGS
Operating Pressure (PSI):	3500	3500
Volume (GPM):	3.8	3.8
Motor (HP):	13.0	13.0 Electric Start
Pump Speed (RPM):	1450	1450
Dimensions - (LxWxH):	32"x 27"x 25"	32"x 27"x 25"
Unit Weight:	175 lbs	180 lbs



CR4035BGS

Features and specifications subject to change without prior notice.

Dynablast®



Distributed by:

LPEXPERT 2013 Inc
1008, rue Marcoux, porte 103
Granby (QC) J2J 2M8
lpexpert@videotron.ca 450 375.3954

www.dynablast.com

CRBG 05/12